



Husky™ Diaphragm Pumps

A Complete Family of Stainless Steel Air-Operated Double Diaphragm Pumps with ANSI/DIN Flange Connections



- Rotatable design simplifies installation
- ANSI 150/DIN PN10 stainless steel flanges
- Rugged construction with high corrosion and abrasion resistance

PROVEN QUALITY. LEADING TECHNOLOGY.

Husky™ Diaphragm Pumps


Simplify installation with our NEW ROTATING FLANGE DESIGN!

The NEW ROTATING FLANGE spins at the inlet and outlet for an easy connection and rapid installation.



With a family of sizes and a variety of materials available for the center section and fluid components, you can select the ideal pump for your application!

You can find our online pump configurator at our product pages from the website. Or go to www.graco.com/pumpselectors.

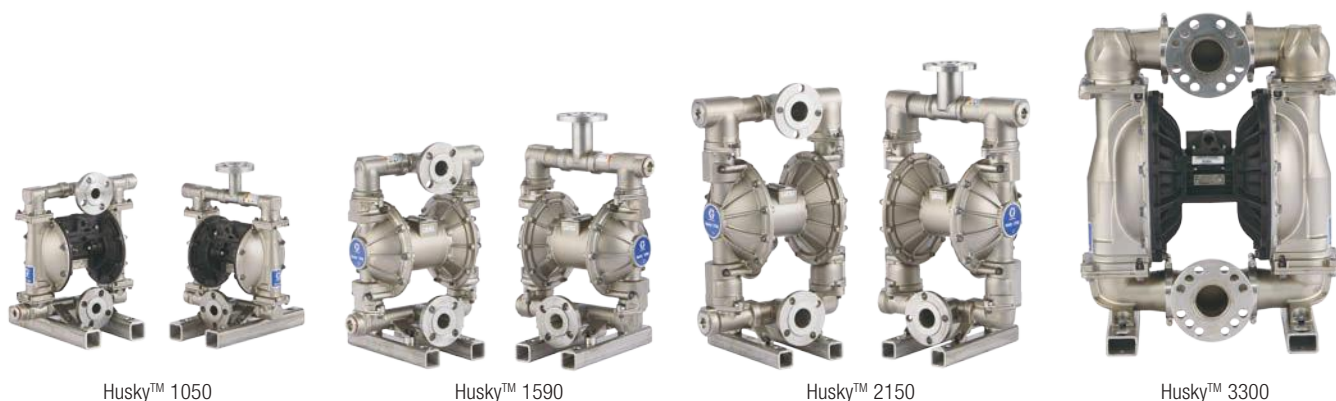

Husky™ 1050

Husky™ 1590

Husky™ 2150

Husky™ 3300

Technical Specifications

Model	1050	1590	2150	3300
Maximum fluid working pressure	8.6 bar (0.86 MPa/125 psi)	8.4 bar (0.84 MPa/120 psi)	8.4 bar (0.84 MPa/120 psi)	8.6 bar (0.86 MPa/125 psi)
Maximum free flow delivery	189 lpm (50 gpm)	378.5 lpm (100 gpm)	568 lpm (150 gpm)	1,136 lpm (300 gpm)
Maximum pump speed	280 cpm	200 cpm	145 cpm	103 cpm
Maximum suction lift	4.9 m (16 ft) dry 8.8 m (29 ft) wet	5.5 m (18 ft) dry or wet	5.5 m (18 ft) dry or wet	4.9 m (16 ft) dry 9.4 m (31 ft) wet
Maximum size pumpable solids	3.2 mm (.125 in)	4.8 mm (.19 in)	6.3 mm (.25 in)	13 mm (.5 in)
Air pressure operating range	1.4-8.6 bar (0.14-0.86 MPa/20-125 psi)	1.4-8.4 bar (0.14-0.84 MPa/20-120 psi)	1.4-8.4 bar (0.14-0.84 MPa/20-120 psi)	1.4-8.6 bar (0.14-0.86 MPa/20-125 psi)
Air inlet size	1/2 npt(f)	1/2 npt(f)	1/2 npt(f)	3/4 in npt(f)
Weight	27.2 kg (60 lb) Aluminium Center	43.5 kg (96 lb) Aluminium Center 50.3 kg (111 lb) Stainless Center	63 kg (139 lb) Aluminium Center 73.5 kg (162 lb) Stainless Center	126 kg (277 lb) Aluminium & Polypropylene Center
Instruction Manual	312877	308441	308368	3A0410

All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

Graco is certified ISO 9001.

GRACO BVBA Industrieterrein Oude Bunders • Slakweidestraat 31 • B-3630 Maasmechelen
Tel: +32 (89) 770 700 • Fax: +32 (89) 770 777 • <http://www.graco.com>

©2017 Graco BVBA 3H1115ENEU Rev. A 03/17 Printed in Europe.

All other brand names or marks are used for identification purposes and are trademarks of their respective owners.

