

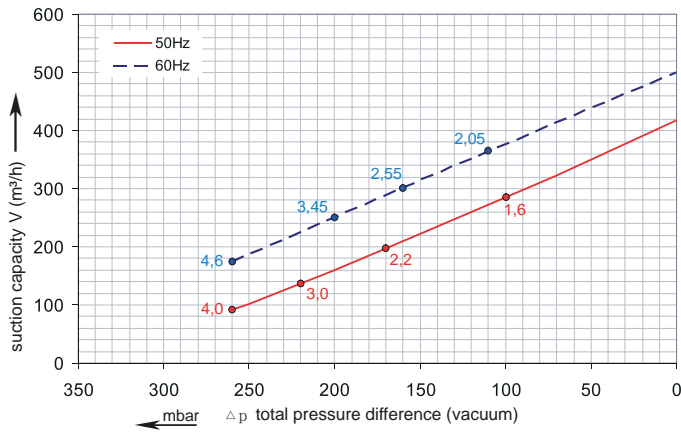
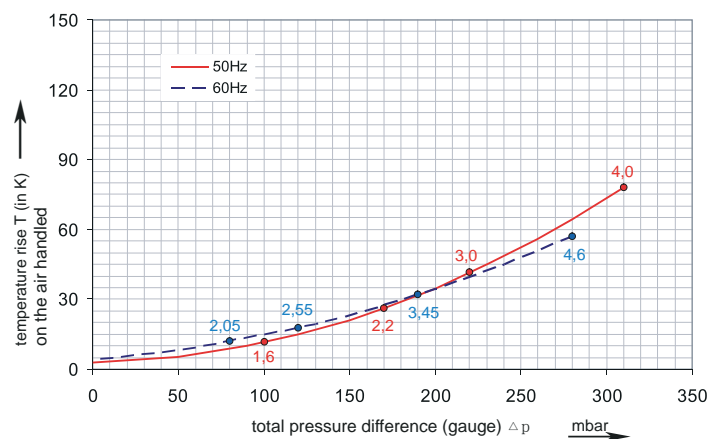
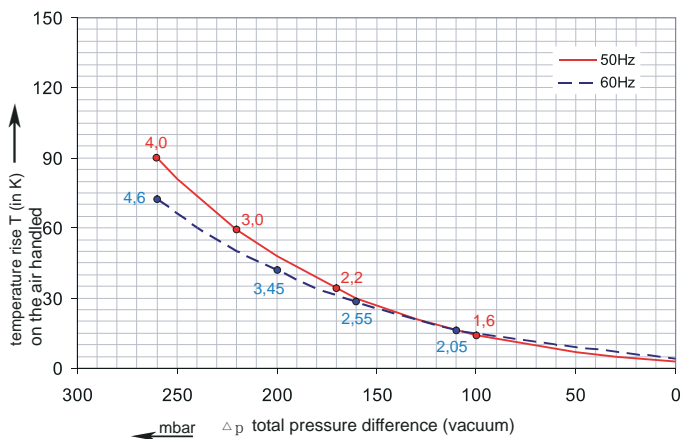
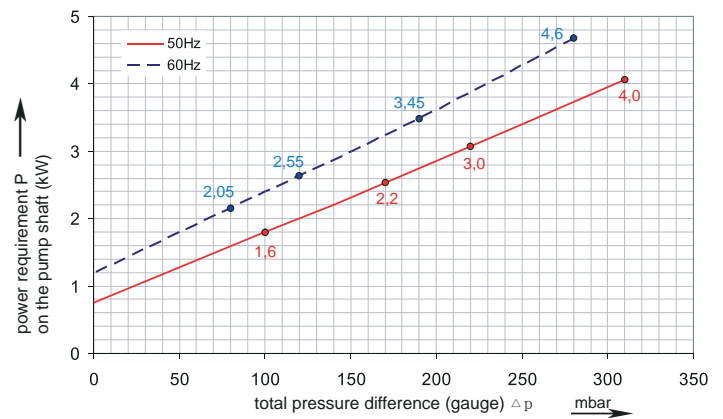


Performance Curve for Vacuum

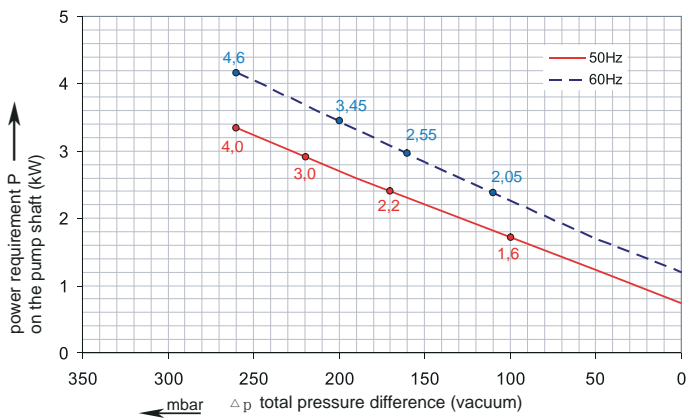

Performance Curve for Pressure

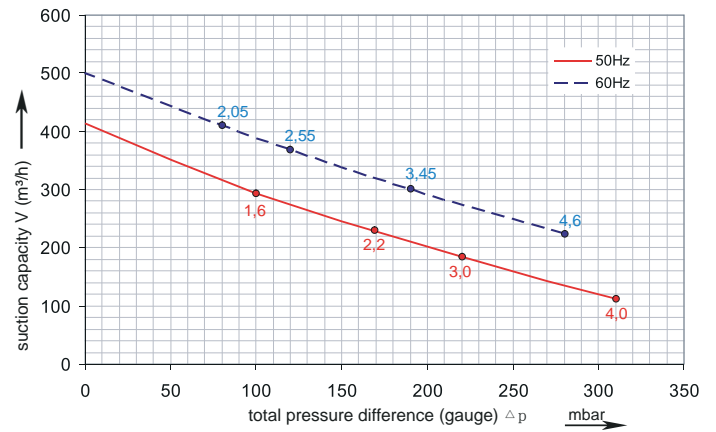

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of +/- 10 %. The total pressure differences are valid for suction and ambient temperatures up to 25 °C. For other conditions please confer with us.

Each Proair Blower can be applied both as vacuum pump and compressor in continuous operation over the total stated performance curve range. The motors are available as standard for the input voltage range of 50 and 60 Hz and for protection category IP 55 as well as approved for UL and CSA.




Selection and ordering data

A-7TS

Order No.	Fre- quency	Rated power	Input voltage		Input current		Permissible total differential pressure ²⁾		Sound pressure level ³⁾	Weight ca.
	Hz	kW	V		A		Vacuum mbar	Compressor mbar	dB(A)	kg

3~ 50/60 Hz IP55 insulation material class F 1)

A7TS-106	50	1.6	200D ... 240D	345Y...415Y	8.5D	4.9Y	-100	100	70	29
	60	2.05	220D ... 275D	380Y...480Y	8.8D	5.1Y	-110	80	73	29
A7TS-116	50	2.2	200D ... 240D	345Y...415Y	9.7D	5.6Y	-170	170	70	32
	60	2.55	220D ... 275D	380Y...480Y	10.3D	6.0Y	-160	120	73	32
A7TS-126	50	3.0	200D ... 240D	345Y...415Y	12.5D	7.2Y	-220	220	70	37
	60	3.45	220D ... 275D	380Y...480Y	12.6D	7.3Y	-200	190	73	37
A7TS-137	50	4.0	345D ... 415D	600Y...720Y	9.0D	5.2Y	-260	310	70	43
	60	4.6	380D ... 480D	660Y...720Y	9.0D	5.2Y	-260	280	73	43



	A	B	C	D	E	F	G	H	J	K	L	M	N	O	φP	Q	φR	S	U	V ₍₁₋₎	V ₍₁₋₎	V ₍₁₃₋₎	V ₍₁₃₋₎	YxZ	X-Holes	φX	W	
A7TS-106	3~	360	366	122	284	325	387	191	197	128	140	180	84	109	54	55	83	15	4.5	M8x17	M25X1.5	M16X1.5	-	-	M10X20	0°/120°/240°	240	29
A7TS-116	3~	360	366	122	284	325	387	191	197	128	140	180	84	109	54	55	83	15	4.5	M8x17	M25X1.5	M16X1.5	-	-	M10X20	0°/120°/240°	240	29
A7TS-126	3~	382	384	125	290	325	419	189	197	135	140	180	84	109	54	55	83	15	4.5	M8x17	M32X1.5	M32X1.5	M32X1.5	M32X1.5	M10X20	0°/120°/240°	240	42
A7TS-137	3~	382	384	125	290	325	432	209	197	148	140	180	84	109	54	55	83	15	4.5	M8x17	M32X1.5	M32X1.5	M32X1.5	M32X1.5	M10X20	0°/120°/240°	240	42



Other voltage ranges

A-7TS □ □		
50Hz	60Hz	↑ ↑
3~		
185...225 V D/320...390 V Y	200...240 V D/345...415 V Y	1 1
200...240 V D/345...415 V Y	200...275 V D/380...480 V Y	1 6
345...415 V D	380...480 V D	1 7
500 V D	575 V D	C 5

Machines according to the ATEX norm 94/4 EG are available for the whole performance range.

Following types available: Category 3 G, 3/2 G, 3 D and 3/2 D.

Further voltage range on request; please quote in plain text.

All Proair Blowers achieve the standards and norms of the low voltage directive (LVD)2006/95/EC, rotating electrotechnical motor EN 60034-1-2004, electromagnetic compatibility(EMC)EN55014-1/2,EN61000-2/-3/-4/-6.

- 1) For standard UL for ELECTRIC MOTOR UL 1004-1.
- 2) Relief-valve are available for limiting differential pressure.
- 3) Measuring-surface sound-pressure level acc. to DIN EN 21680, measured at a distance of 1 m. The pump is throttled to an average suction pressure, a hose is connected to the discharge side (compressor) / suction side (vacuum pump), but is not fitted with relief valves.

The motors are designed according to the DIN EN 60 034 / DIN IEC 34-1 and temperature class F.

For the three phase machines the tolerances are +/- 10 % for fixed voltage and +/- 5 % for voltage range.

The single phase machines are designed with a +/- 5 % tolerances. If only 90 % of the maximum allowed pressure will be used for the continuousoperating then the allowed voltage range add to +/- 10 %.

For all single and three phase machines which designed according to the UL and CSA norm (UL 1004-1) the maximum allowed voltage tolerances are - 10 % resp. + 6 %.

The frequency tolerance is maximum +/- 2 %.

Changes in particular the quoted performance curve, datas and weights without prior notice. The figures are without obligations.

03.2015