
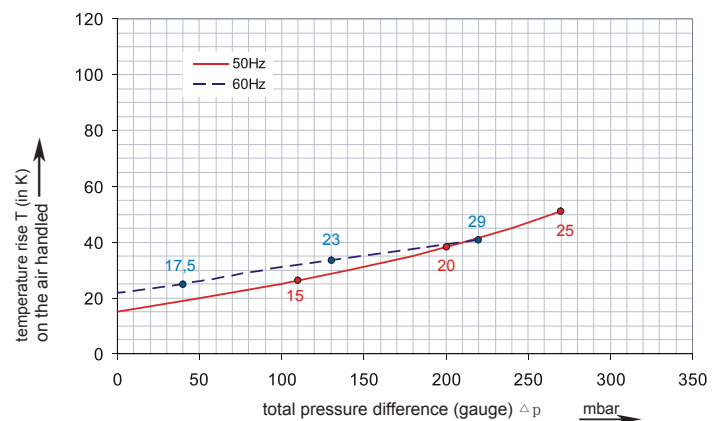
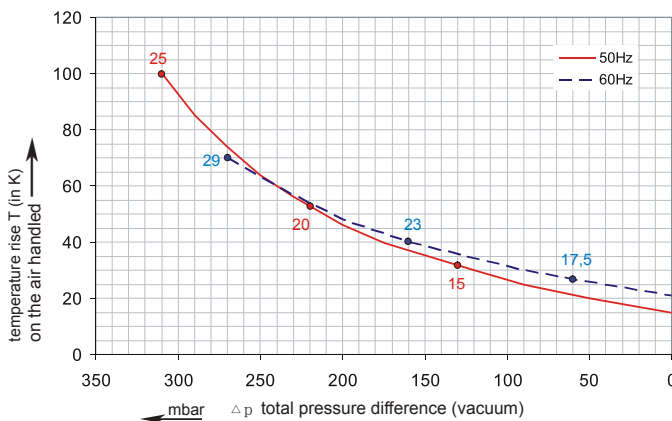
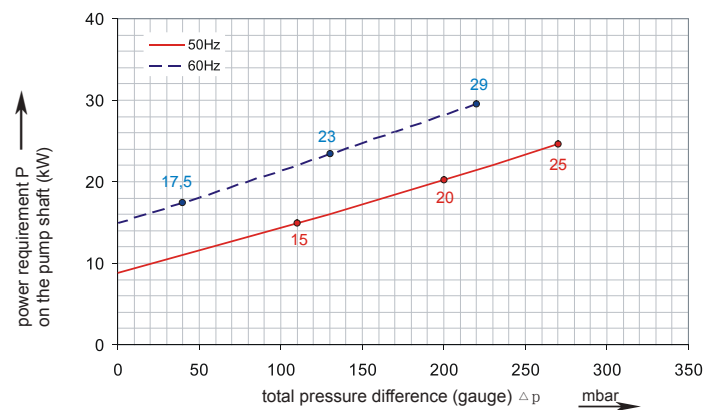
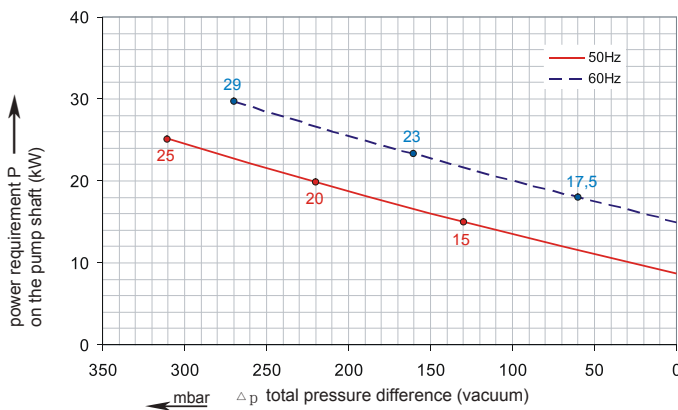
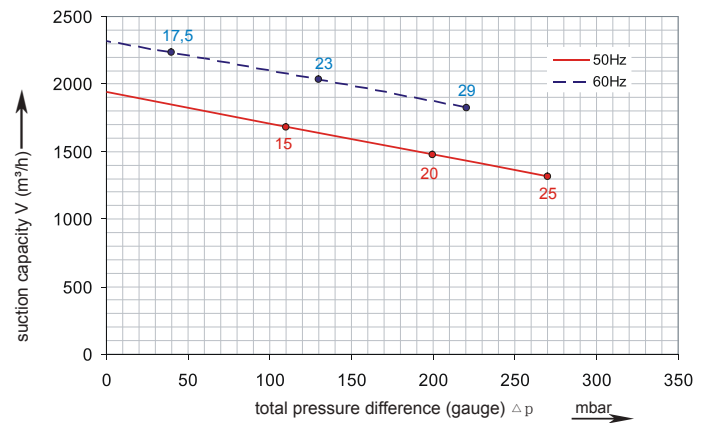


Performance Curve for Vacuum

Performance Curve for Pressure

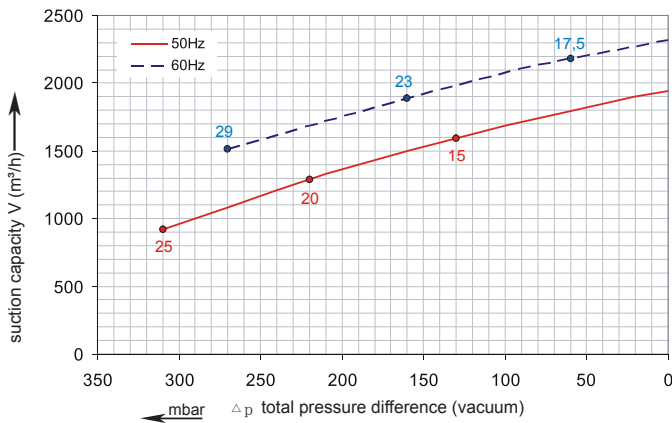

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of +/- 10 %. The total pressure differences are valid for suction and ambient temperatures up to 25 °C. For other conditions please confer with us.

Each Proair Blower type can be applied both as vacuum pump and compressor in continuous operation over the total stated performance curve range. The motors are available as standard for the input voltage range of 50 and 60 Hz and for protection category IP 55 as well as approved for UL and CSA.


Selection and ordering data

A9MD

Order No.	Fre- quency	Rated power	Input voltage		Input current	Permissible total differential pressure ²⁾		Sound pressure level ³⁾	Weight ca.
						Vacuum mbar	Compressor mbar		
	Hz	kW	V		A			dB(A)	kg

3~ 50/60 Hz IP55 isulation material class F 1)

A9MD-427	50	15.0	345D...415D	600Y...720Y	35.0D	20.0Y	-130	110	75	187
	60	17.5	380D...480D	660Y...720Y	36.5D	21.0Y	-60	40	84	187
A9MD-437	50	20.0	345D...415D	600Y...720Y	40.0D	23.0Y	-220	200	75	212
	60	23.0	380D...480D	660Y...720Y	42.0D	24.2Y	-160	130	84	212
A9MD-447	50	25.0	345D...415D	600Y...720Y	52.0D	30.0Y	-310	270	75	219
	60	29.0	380D...480D	660Y...720Y	52.0D	30.0Y	-270	220	84	219

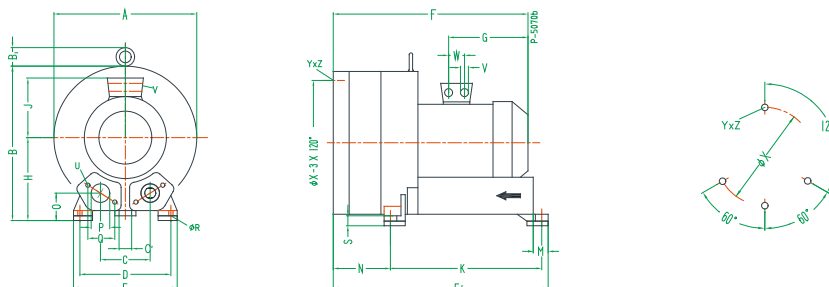

Type	Phases																					X-Holes						
		A	B	B1	C	C'	D	E	F	F'	G	H	J	K	M	N	O	ØP	Q	ØR	S		U	V	W	ØX	YxZ	
A9MD-427	3~	615	657	16	207	15	380	415	752	786	345	350	197	533	39	280	142	100	140	15	71	M12x35	4xM40x1.5	54	490	M12x30	120°/60°/60°	
A9MD-437	3~																											
A9MD-447	3~								812																			



Other voltage ranges

A9TD-4

50Hz

60Hz



3~

185...225 V D/320...390 V Y

200...240 V D/345...415 V Y

4 1

200...240 V D/345...415 V Y

200...275 V D/380...480 V Y

4 6

345...415 V D

380...480 V D

4 7

500 V D

575VD

C 5

Machines according to the ATEX norm 94/4 EG are available for the whole performance range.

Following types available: Category 3 G, 3/2 G, 3 D and 3/2 D.

Further voltage range on request; please quote in plain text.

Proair Blowers achieve the standards and norms of the low voltage directive (LVD)2006/95/EC, rotating electrotechnical motor EN 60034-1-2004, electromagnetic compatibility(EMC) EN55014-1/2, EN61000-2/3/4/6.

- 1) For standard UL for ELECTRIC MOTOR UL 1004-1.
- 2) Relief-valve are available for limiting differential pressure.
- 3) Measuring-surface sound-pressure level acc. to DIN EN 21680, measured at a distance of 1 m. The pump is throttled to an average suction pressure, a hose is connected to the discharge side (compressor) / suction side (vacuum pump), but is not fitted with relief valves.

The motors are designed according to the DIN EN 60 034 / DIN IEC 34-1 and temperature class F.

For the three phase machines the tolerances are +/- 10 % for fixed voltage and +/- 5 % for voltage range.

The single phase machines are designed with a +/- 5 % tolerances. If only 90 % of the maximum allowed pressure will be used for the continuous operating then the allowed voltage range add to +/- 10 %.

For all single and three phase machines which designed according to the UL and CSA norm (UL 1004-1) the maximum allowed voltage tolerances are - 10 % resp. + 6 %.

The frequency tolerance is maximum +/- 2 %.

Changes in particular the quoted performance curve, data and weights without prior notice. The figures are without obligations.

PROAIR SIDE CHANNEL BLOWER

PROAIR